


AIRTAC 6D Haberleşmeli Pnömatik Valfler/ AIRTAC 6D Communication Pneumatic Valves**Manual Lock Design**

1. Manual push does not automatically lock, used for valve installation and debugging.
2. Use caution, prior to activating manual override.
3. With the correct size screw driver: gently press and turn to lock (Torque: 0.1N.m)

**Multi-series and Multi-port types are optional**

6D0500, 6D100, 6D200 series ;
Φ4, Φ6, Φ8, Φ10ports for options.

Series/Ports(A\B ports)	Φ4	Φ6	Φ8	Φ10
6D0500	•	•		
6D100	•	•	•	
6D200			•	•

Adaptor design of pilot valve

Easy to install with stable signaling,
decreases risk during manual wiring

Consolidate Input

The D-SUB25PIN cable,
simplifies wiring process
and enhances
risk-resisting function.

Dual Centralized inlet ports

Centralized inlet,
convenient piping, saving installation space.

Series	6D0500	6D100	6D200
Ports(P)	Φ8	Φ10	Φ12

Dual Centralized outlet ports

Centralized exhaust,
convenient piping, saving installation space.

Series	6D0500	6D100	6D200
Ports(R)	Φ8	Φ10	Φ12

Manifold design

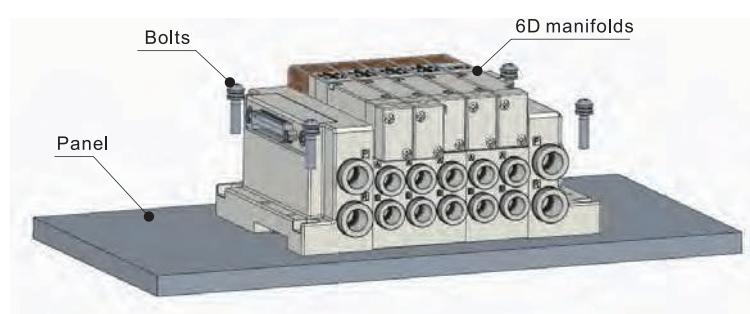
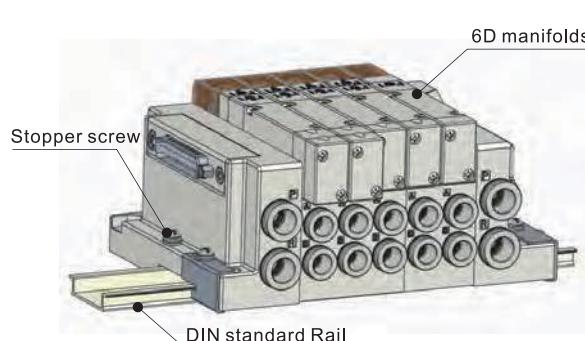
It is convenient and flexible to disassemble and replace.

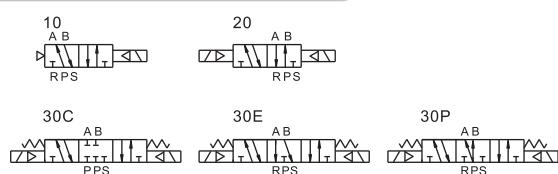
DIN rail compatibility

Manifold is compatible with DIN standard rail.
6D integrated valve can be fixed at any position of rail by stop screw.

Diverse installation

With four bolts, it can be fixed anywhere on panel.



AIRTAC 6D Haberleşmeli Pnömatik Valfler/ AIRTAC 6D Communication Pneumatic Valves**Specification****Symb • I****Product feature**

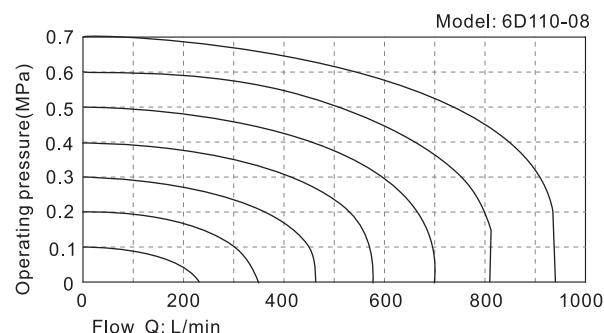
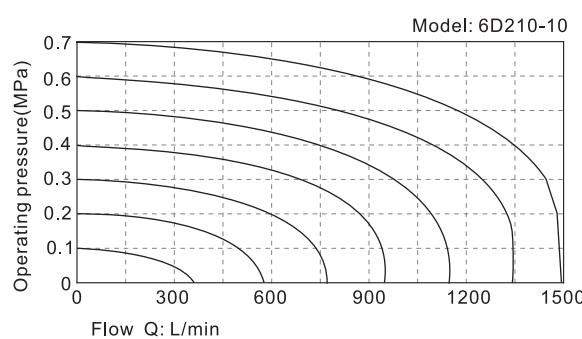
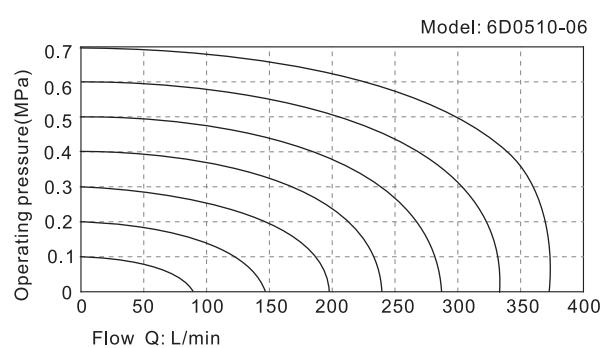
1. Centralized inlets, outlets and signal input(25pin D-SUB) make it highly simplifies installation and reduces risk during mounting.
2. Flexible combination for various applications.
3. Convenient installation, can be fixed on panel or DIN rail without other accessory.
4. 2 position and 3 position valves can be installed on the same manifold without further accessories.
5. Affiliated manual devices are equipped to facilitate installation and debugging.
6. Low starting voltage and long service life.

Model	6D0500	6D100	6D200
Fluid	Air(to be filtered by 40μm filter element)		
Acting	Pilot		
Operating pressure	5/3 way Others	0.2~0.8MPa(29~114psi) 0.15~0.8MPa(21~114psi)	
Proof pressure		1.2MPa(175psi)	
Temperature		-20~70°C	
Type of inlet and exhaust	Centralized inlet and exhaust		
Numbers of station	Single solenoid valves Dual solenoid valves	3-21 stations 3-21 stations [Note1]	
Port size	A, B ports P, R ports	Φ4/Φ6 tube fitting Φ8 tube fitting	Φ4/Φ6/Φ8 tube fitting Φ10 tube fitting Φ8/Φ10 tube fitting Φ12 tube fitting
Electrical entry		Terminal , 25pinD-SUB	

Note1: On 3 to 18 station valve banks, only the first 6 positions can have double solenoid valves(2 or 3 positions)
On 19 to 21 station valve banks, only the first 3 positions can have double solenoid valves(2 or 3 positions)

Coil specification

Item	Specification	
Standard voltage	DC24V	DC12V
Scope of voltage	DC : ±10%	
Power of consumption	DC : 0.9W	
Protection	Dustproof	
Temperature classification	F Class	
Electrical entry	Terminal	
Activating time	0.05 sec and below	

Flow chart

Flow rate data obtained from the AirTAC R&D Lab.

AIRTAC 6D Haberleşmeli Pnömatik Valfler/ AIRTAC 6D Communication Pneumatic Valves

Manifold ports Ordering Code (With Valves)

6D W 1H 8F-J06 B S1 D2 C2 E2 P1 □

(1) (2) (3) (4) (5) (6) (7) (8) (9) (10) (11)



Without communication module		Without communication module		With communication module
① Valve type		Blank: Standard type W: Valve with double solenoid manifold(7~12 stations)		
② Model		05H: 6D0500 Series integrated Solenoid valve	1H: 6D100 Series integrated Solenoid valve	2H: 6D200 Series integrated Solenoid valve
③ Number of stations		3F: 3 stations	4F: 4 stations	21F: 21stations
④ Port size(A/B Port)		J04: Φ4 tube fitting J06: Φ6 tube fitting	J04: Φ4 tube fitting J06: Φ6 tube fitting J08: Φ8 tube fitting	J08: Φ8 tube fitting J10: Φ10 tube fitting
⑤ Standard voltage		B:DC24V F:DC12V		
⑥ Single solenoid 5/2 way		Blank: No	S1: 1 piece	S2: 2 pieces
⑦ Double solenoid 5/2 way		Blank: No	D1: 1 piece	D2: 2 pieces
⑧ Double solenoid 5/3 way closed center		Blank: No	C1: 1 piece	C2: 2 pieces
⑨ Double solenoid 5/3 way exhaust center		Blank: No	E1: 1 piece	E2: 2 pieces
⑩ Double solenoid 5/3 way pressure center		Blank: No	P1: 1 piece	P2: 2 pieces
⑪ Type of communication module		Blank: Without communication module CPN1: Profinet+PNP CPN2: Profinet+NPN CEN1: EtherNet/IP+PNP CEN2: EtherNet/IP+NPN		

Ordering code instruction:

- Fill in spec, number of stations, port size, voltage in order code accordingly.
- Valve installation sequence : start from D-SUB side.
- Valve installation sequence : (1) Double solenoid 5/3 way(C→E→P). (2) Double solenoid 5/3 way. (3)Single solenoid.
- For empty position, please install provisional block.
- 0500 series in/outlet ports (P/R) is Ø8, 100 series in/outlet ports (P/R) is Ø10, 200 series in/outlet ports (P/R) is Ø12
- Less than 8 stations(inclusive):come with 1 plug type silencer and 2 plugs; More than 8 stations: come with 2 plug type silencers and 1 plug.
- Total numbers of valves must be ≤21
- For station 3-18 of standard type, total numbers of ⑥+⑦+⑧+⑩ must be ≤6 ; station 19-21 of standard type, total numbers of ⑥+⑦+⑧+⑩ must be ≤3.
- When total number of double solenoid valves ≥7 is required, only 6DW series is optional;
- For 6DW series: total number of double solenoids+single solenoids must be ≤12;
- When only 3/4/5/6 stations of double solenoids are required, it is sufficient to select a standard type valve.
- Other protocols: EtherCAT, IO-Link are estimated to be released in Jan.2023.

Manifold ports Ordering Code (Without Valves)

6D W 1H 8F J06



(1) (2) (3) (4)




① Manifold type	Blank: Standard type W: Double solenoid manifold(7~12 stations)		
② Model	05H: 6D0500 Series manifold	1H: 6D100 Series manifold	2H: 6D200 Series manifold
③ Number of stations	3F: 3 stations 4F: 4 stations		
④ Port size(A/B Port)	J04: Φ4 tube fitting J06: Φ6 tube fitting	J04: Φ4 tube fitting J06: Φ6 tube fitting J08: Φ8 tube fitting	J08: Φ8 tube fitting J10: Φ10 tube fitting

Note:

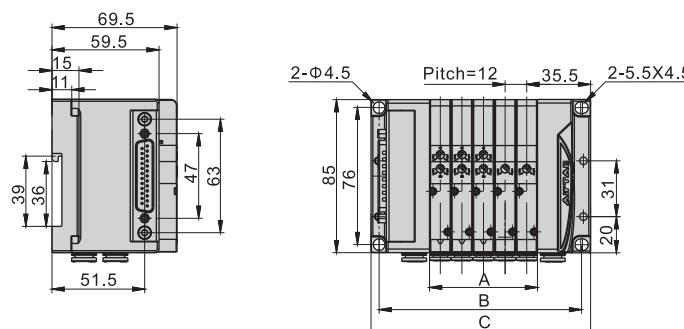
- On 3 to 18 station valve banks of standard type only the first 6 positions can have double solenoid valves(2 or 3 positions)
- On 19 to 21 station valve banks of standard type only the first 3 positions can have double solenoid valves(2 or 3 positions)
- Valve installation sequence: start from D-SUB side.
- 0500 series in/outlet ports (P/R) is Ø8, 100 series in/outlet ports (P/R) is Ø10, 200 series in/outlet ports (P/R) is Ø12
- Less than 8 stations(inclusive): come with 1 plug type silencer and 2 plugs; More than 8 stations: come with 2 plug type silencers and 1 plug.
- When total number of double solenoid valves ≥7 is mounted, only 6DW series is optional;
- For 6DW series: total number of double solenoids+single solenoids can be mounted must be ≤12;
- When only 3/4/5/6 stations of double solenoids are mounted, it is sufficient to select a standard type manifold.

AIRTAC 6D Haberleşmeli Pnömatik Valfler/ AIRTAC 6D Communication Pneumatic Valves**Solenoid Valve Ordering Code****Provisional Block Ordering Code**

Note: Orders come with screw bolts.

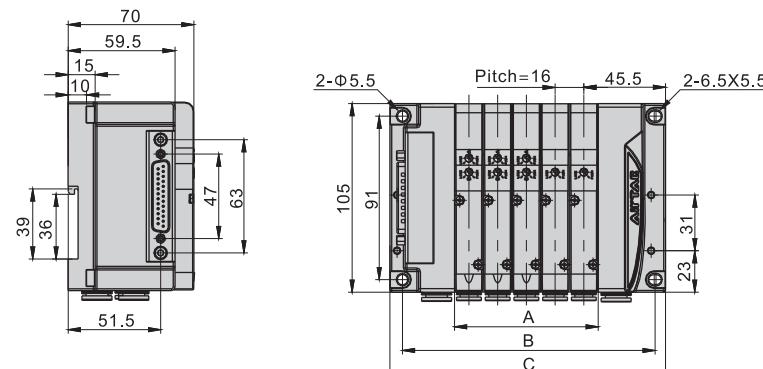
DIN Rail Ordering Code

Note: DIN rail add length is 35mm each step.

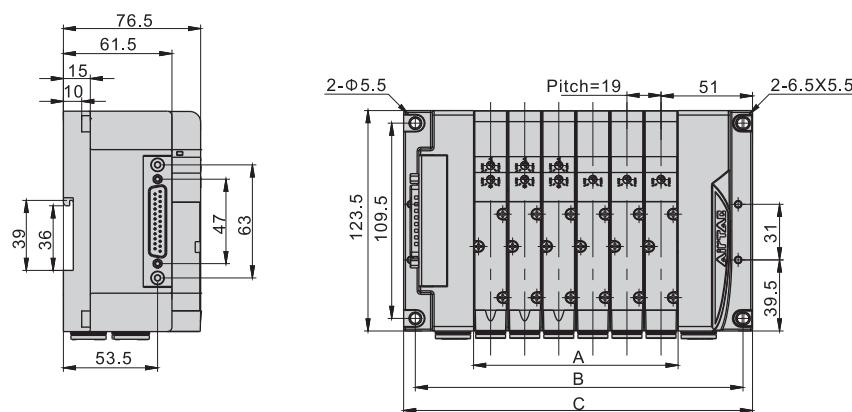
Dimensions**6D0500**

Item\Stations	3F	4F	5F	6F	7F	8F	9F	10F	11F	12F	13F	14F	15F	16F	17F	18F	19F	20F	21F
A	36	48	60	72	84	96	108	120	132	144	156	168	180	192	204	216	228	240	252
B	88.5	100.5	112.5	124.5	136.5	148.5	160.5	172.5	184.5	196.5	208.5	220.5	232.5	244.5	256.5	268.5	280.5	292.5	304.5
C	98	110	122	134	146	158	170	182	194	206	218	230	242	254	266	278	290	302	314

AIRTAC 6D Haberleşmeli Pnömatik Valfler/ AIRTAC 6D Communication Pneumatic Valves

6D100

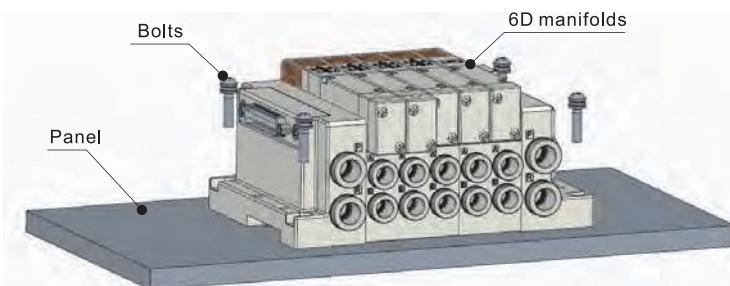
Item\Stations	3F	4F	5F	6F	7F	8F	9F	10F	11F	12F	13F	14F	15F	16F	17F	18F	19F	20F	21F
A	48	64	80	96	112	128	144	160	176	192	208	224	240	256	272	288	304	320	336
B	108.5	124.5	140.5	156.5	172.5	188.5	204.5	220.5	236.5	252.5	268.5	284.5	300.5	316.5	332.5	348.5	364.5	380.5	396.5
C	121.5	137.5	153.5	169.5	185.5	201.5	217.5	233.5	249.5	265.5	281.5	297.5	313.5	329.5	345.5	361.5	377.5	393.5	409.5

6D200

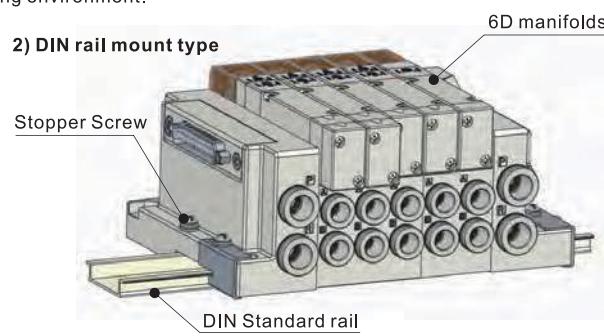
Item\Stations	3F	4F	5F	6F	7F	8F	9F	10F	11F	12F	13F	14F	15F	16F	17F	18F	19F	20F	21F
A	57	76	95	114	133	152	171	190	209	228	247	266	285	304	323	342	361	380	399
B	125.5	144.5	163.5	182.5	201.5	220.5	239.5	258.5	277.5	296.5	315.5	334.5	353.5	372.5	391.5	410.5	429.5	448.5	467.5
C	137.5	156.5	175.5	194.5	213.5	232.5	251.5	270.5	289.5	308.5	327.5	346.5	365.5	384.5	403.5	422.5	441.5	460.5	479.5

Installation and application

1. Two types of installation are available, choose appropriate type based on working environment.

1) Panel mount type

Four counterbore holes for screw bolts, suitable for panel installation.

2) DIN rail mount type

Compatible with standard DIN rail.

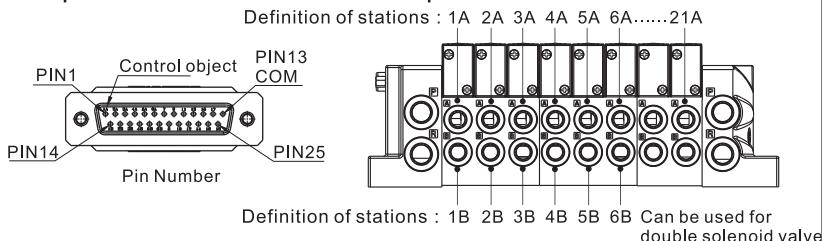
6D manifolds can be fixed at any position of rail by stop screw.

2. P\R ports connection: Please select the appropriate tube diameter according to the following specification table.

Series	Port (P)	Port (R)
6D0500	Φ8	Φ8
6D100	Φ10	Φ10
6D200	Φ12	Φ12

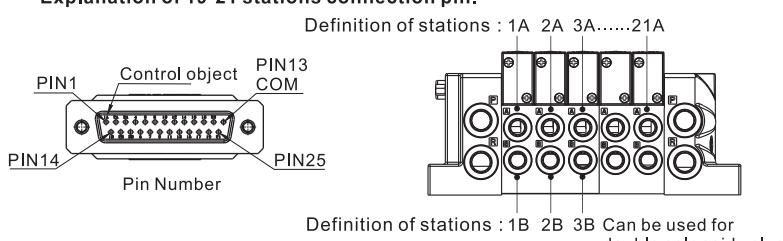
3. A\B ports connection: Please select the appropriate tube diameter according to the following specification table.

Series\Ports(A\B ports)	Φ4	Φ6	Φ8	Φ10
6D0500	•	•		
6D100	•	•	•	
6D200			•	•

AIRTAC 6D Haberleşmeli Pnömatik Valfler/ AIRTAC 6D Communication Pneumatic Valves**4. Pin Assignment :****Explanation of 3-18 stations connection pin.**

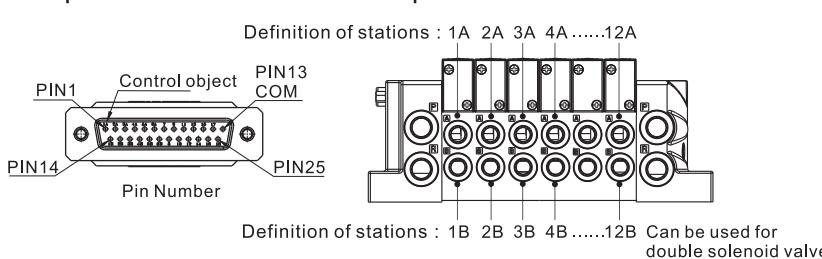
Pin NO.	Polarity		Control object	Pin NO.	Polarity		Control object
	-COM	+COM			-COM	+COM	
1	(+)	(-)	1A	14	(+)	(-)	1B
2	(+)	(-)	2A	15	(+)	(-)	2B
3	(+)	(-)	3A	16	(+)	(-)	3B
4	(+)	(-)	4A	17	(+)	(-)	4B
5	(+)	(-)	5A	18	(+)	(-)	5B
6	(+)	(-)	6A	19	(+)	(-)	6B
7	(+)	(-)	7A	20	(+)	(-)	8A
8	(+)	(-)	9A	21	(+)	(-)	10A
9	(+)	(-)	11A	22	(+)	(-)	12A
10	(+)	(-)	13A	23	(+)	(-)	14A
11	(+)	(-)	15A	24	(+)	(-)	16A
12	(+)	(-)	17A	25	(+)	(-)	18A
13	(-)	(+)	COM				

Note: Gauge number of cable connecting to D-Sub pin No.13(COM) must be≤22AWG

Explanation of 19-21 stations connection pin.

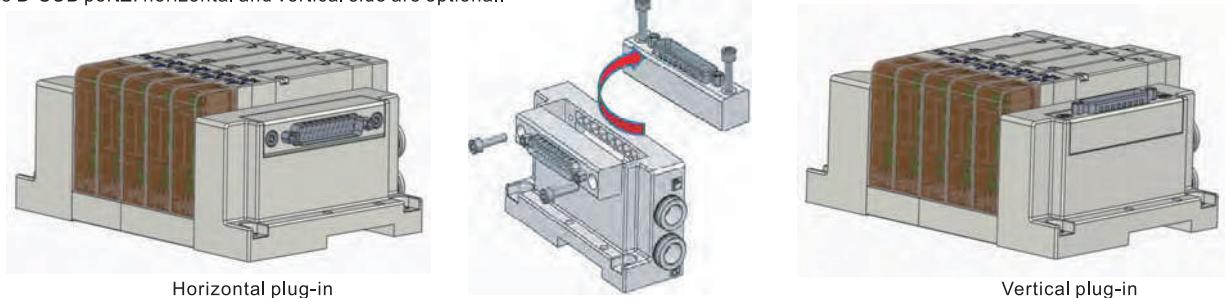
Pin NO.	Polarity		Control object	Pin NO.	Polarity		Control object
	-COM	+COM			-COM	+COM	
1	(+)	(-)	1A	14	(+)	(-)	1B
2	(+)	(-)	2A	15	(+)	(-)	2B
3	(+)	(-)	3A	16	(+)	(-)	3B
4	(+)	(-)	4A	17	(+)	(-)	5A
5	(+)	(-)	6A	18	(+)	(-)	7A
6	(+)	(-)	8A	19	(+)	(-)	9A
7	(+)	(-)	10A	20	(+)	(-)	11A
8	(+)	(-)	12A	21	(+)	(-)	13A
9	(+)	(-)	14A	22	(+)	(-)	15A
10	(+)	(-)	16A	23	(+)	(-)	17A
11	(+)	(-)	18A	24	(+)	(-)	19A
12	(+)	(-)	20A	25	(+)	(-)	21A
13	(-)	(+)	COM				

Note: Gauge number of cable connecting to D-Sub pin No.13(COM) must be≤22AWG

Explanation of 6DW series connection pin

Pin NO.	Polarity		Control object	Pin NO.	Polarity		Control object
	-COM	+COM			-COM	+COM	
1	(+)	(-)	1A	14	(+)	(-)	1B
2	(+)	(-)	2A	15	(+)	(-)	2B
3	(+)	(-)	3A	16	(+)	(-)	3B
4	(+)	(-)	4A	17	(+)	(-)	4B
5	(+)	(-)	5A	18	(+)	(-)	5B
6	(+)	(-)	6A	19	(+)	(-)	6B
7	(+)	(-)	7A	20	(+)	(-)	7B
8	(+)	(-)	8A	21	(+)	(-)	8B
9	(+)	(-)	9A	22	(+)	(-)	9B
10	(+)	(-)	10A	23	(+)	(-)	10B
11	(+)	(-)	11A	24	(+)	(-)	11B
12	(+)	(-)	12A	25	(+)	(-)	12B
13	(-)	(+)	COM				

Note: Gauge number of cable connecting to D-Sub pin No.13(COM) must be≤22AWG

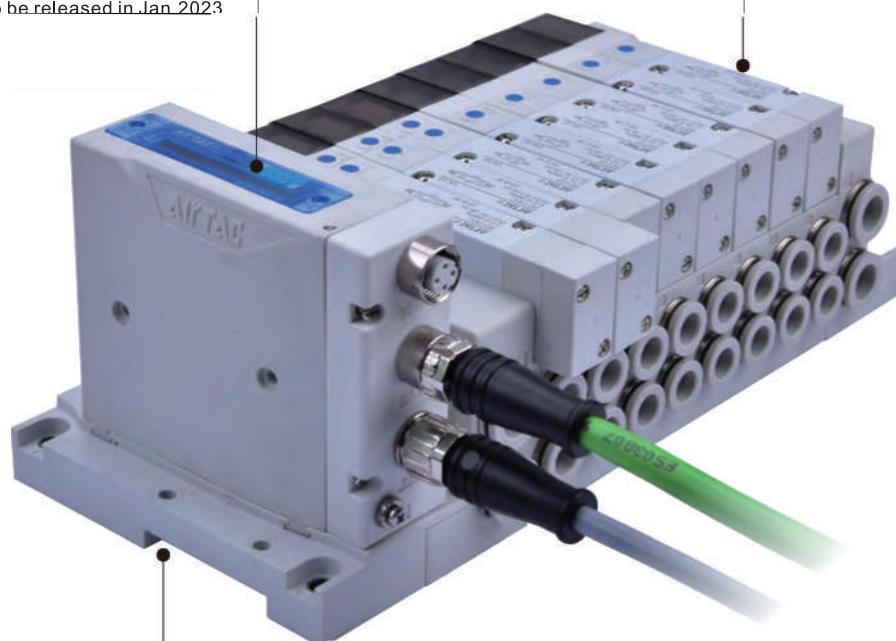
5. Flip-able D-SUB portZ: horizontal and vertical side are optional.

AIRTAC 6D Haberleşmeli Pnömatik Valfler/ AIRTAC 6D Communication Pneumatic Valves

Multiple communication modules and protocols are optional

Communication module No.	Protocols	Applicable model
1	PROFINET	6D0500
2	EtherNet/IP	6D100
3	EtherCAT	6D200
4	IO-Link	

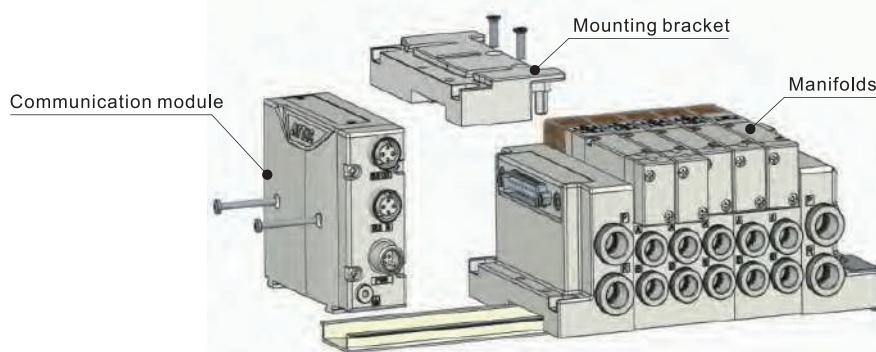
Note: EtherCAT, IO-Link are estimated to be released in Jan 2023



Mounting accessory

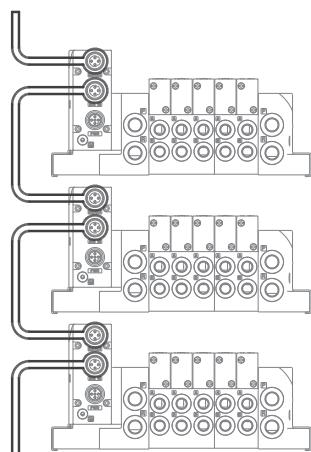
No.	Ordering code
1	F-6D0500PN-R2
2	F-6D100PN-R2
3	F-6D200PN-R2

Integration design of communication module

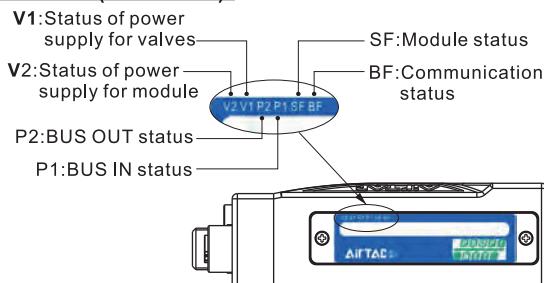
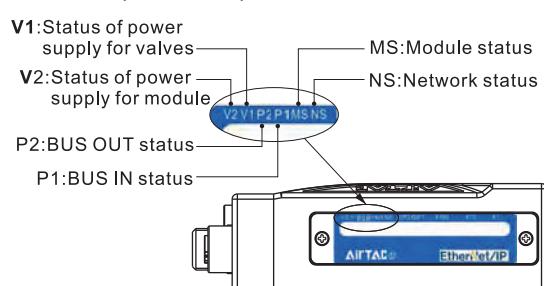


Network Topology

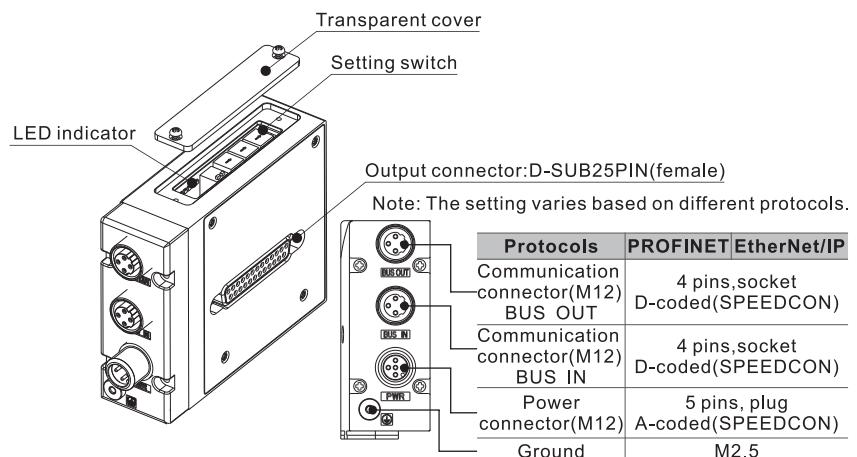

Daisy-chain wiring



AIRTAC 6D Haberleşmeli Pnömatik Valfler/ AIRTAC 6D Communication Pneumatic Valves

**LED indicator****Profinet(C-6DPN□)****EtherNet/IP(C-6DEN□)****Specification**

Protocol	PROFINET	EtherNet/IP
Number of outputs	24 outputs	
Communication speed	100Mbps	
Configuration file	GSDML file	EDS file
Input power	Voltage Current consumption	DC24V ± 10% <100mA
Voltage output	DC24V ± 10%	
Output type	PNP or NPN	
Power connector	M12 plug 5 pins A-coded	
Bus connector	2XM12 socket 4 pins D-coded	
Protection	Dust proof	
Working temperature	-10~60°C	
Working humidity	35~85% RH	
Withstand voltage	AC500V 1min	Between terminals and housing
Insulation resistance	>10MΩ (DC500V),	Between terminals and housing
Communication connection		Daisy-chain wiring


Construction and function**Ordering Code of communication module**

6D : 6D series communication module

PN : Profinet EN : EtherNet/IP

1 : PNP+24 outputs 2 : NPN+24 outputs

Note: 1.EtherCAT, IO-Link are estimated to be released in Jan.2023. 2.Product comes with mounting screws.

Ordering Code of communication cableM12 male connector
D-coded

M12 to M12

RJ45



M12 to RJ45



M12 to M12

C-M12 : Communication cable (M12male connector)

Blank : M12 male connectors on both end

RJ : M12 male connector+RJ45 terminal

PN : Applicable to Profinet, EtherNet/IP

Blank: Cable


050 : 0.5m 100 : 1m 200 : 2m 300 : 3m 500 : 5m

Note: EtherCAT, IO-Link are estimated to be released in Jan.2023.

AIRTAC 6D Haberleşmeli Pnömatik Valfler/ AIRTAC 6D Communication Pneumatic Valves

Ordering Code of power supply cable

F -M12 PN □ 150




① Model	F-M12 : Power supply cable (M12 female connector)
② Protocol type	PN : Applicable to Profinet, EtherNet/IP
③ Cable type	Blank : Cable
④ Cable length	150 : 1.5m 300 : 3m 500 : 5m



Note: EtherCAT, IO-Link are estimated to be released in Jan.2023.

Ordering Code of mounting bracket

F -6D0500 PN - R2

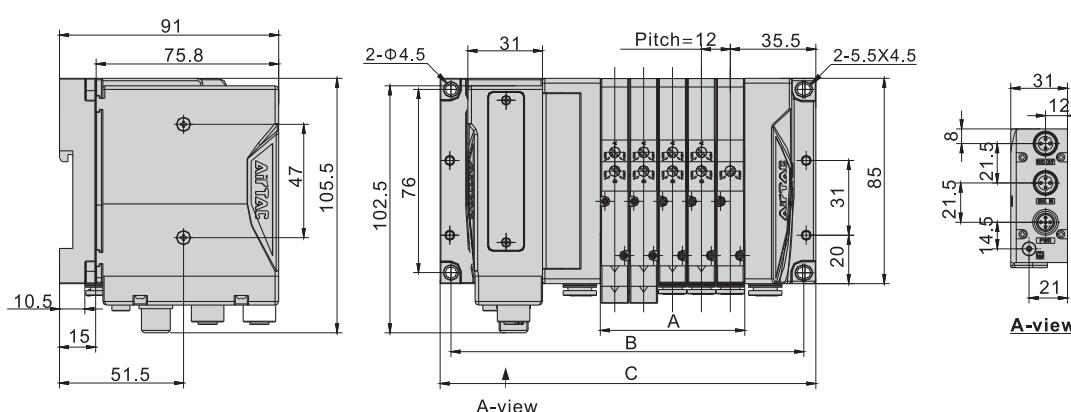


① Model	F: Mounting accessory
② Code	6D0500: 6D0500 Series 6D100: 6D100 Serie 6D200: 6D200 Serie
③ Protocol type	PN: For 6D module installation
④ Output type	R2: Mounting bracket for communication module

Note: Product comes with mounting screws.

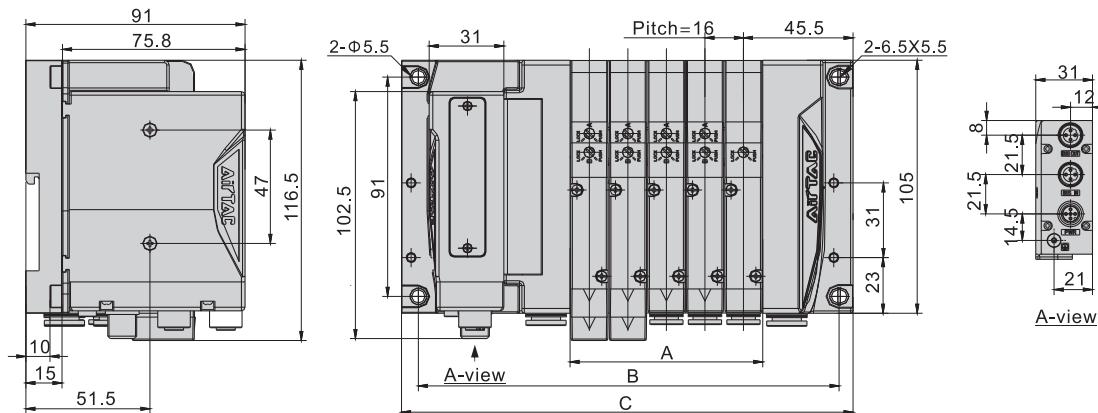
Dimensions

6D0500 series with communication module

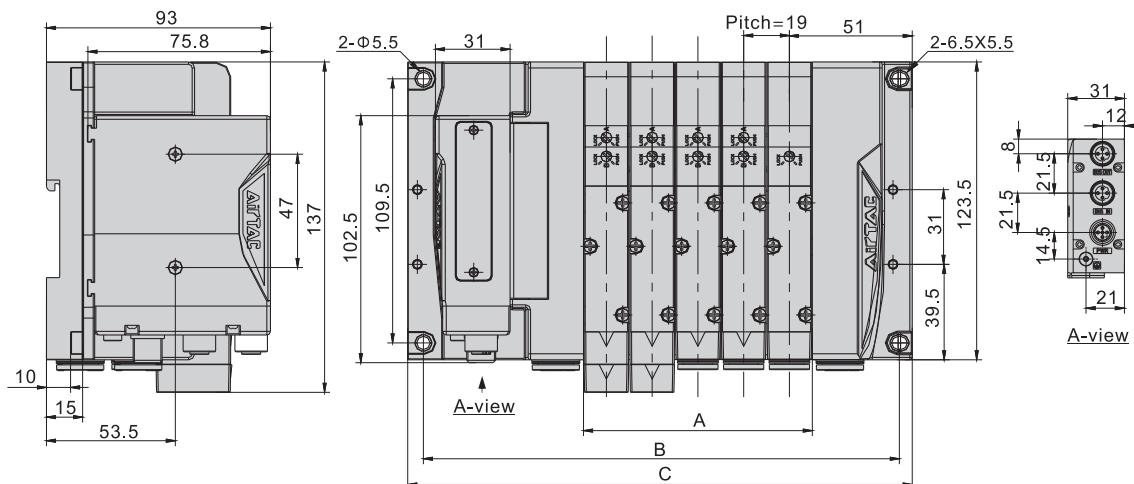


Item\Stations	3F	4F	5F	6F	7F	8F	9F	10F	11F	12F	13F	14F	15F	16F	17F	18F	19F	20F	21F
A	36	48	60	72	84	96	108	120	132	144	156	168	180	192	204	216	228	240	252
B	122.5	134.5	146.5	158.5	170.5	182.5	194.5	206.5	218.5	230.5	242.5	254.5	266.5	278.5	290.5	302.5	314.5	326.5	338.5
C	132	144	156	168	180	192	204	216	228	240	252	264	276	288	300	312	324	336	348

AIRTAC 6D Haberleşmeli Pnömatik Valfler/ AIRTAC 6D Communication Pneumatic Valves

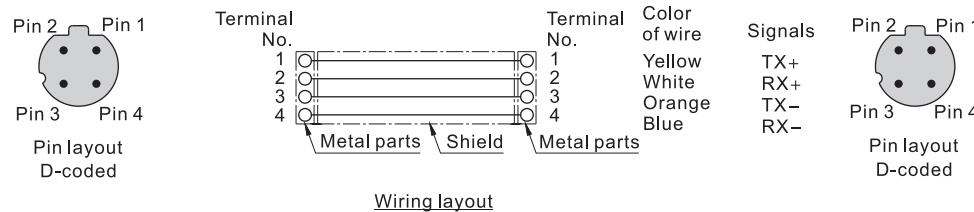
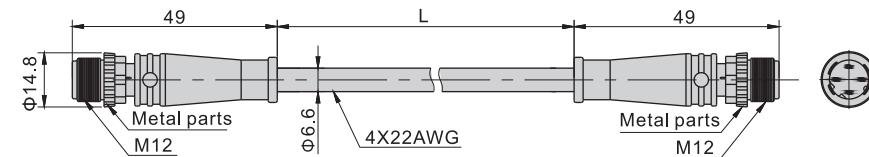
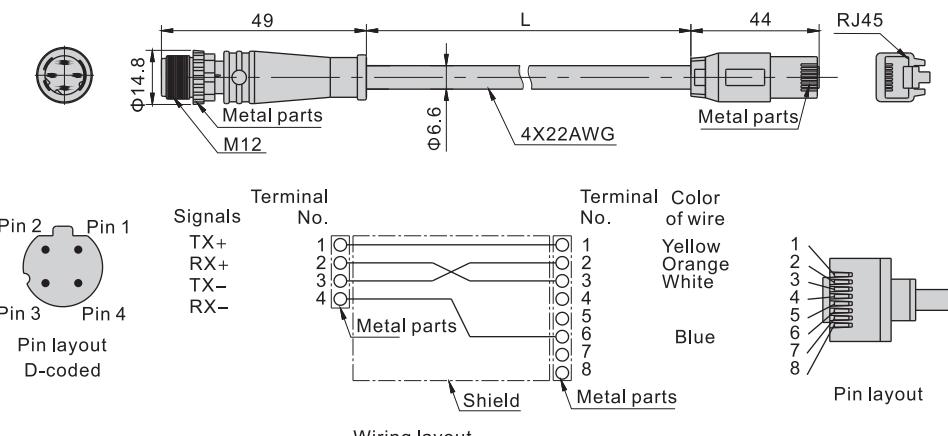
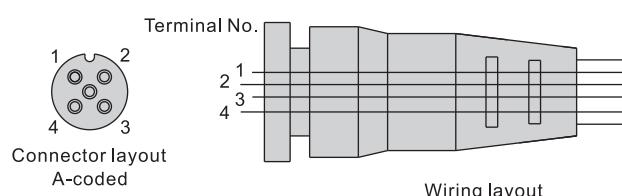
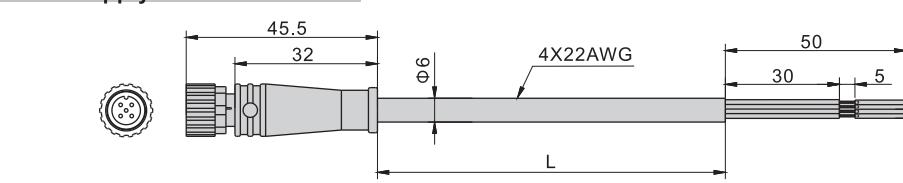
6D100 series with communication module

Item\Stations	3F	4F	5F	6F	7F	8F	9F	10F	11F	12F	13F	14F	15F	16F	17F	18F	19F	20F	21F
A	48	64	80	96	112	128	144	160	176	192	208	224	240	256	272	288	304	320	336
B	142.5	158.5	174.5	190.5	206.5	222.5	238.5	254.5	270.5	286.5	302.5	318.5	334.5	350.5	366.5	382.5	398.5	414.5	430.5
C	155.5	171.5	187.5	203.5	219.5	235.5	251.5	267.5	283.5	299.5	315.5	331.5	347.5	363.5	379.5	395.5	411.5	427.5	443.5

6D200 series with communication module

Item\Stations	3F	4F	5F	6F	7F	8F	9F	10F	11F	12F	13F	14F	15F	16F	17F	18F	19F	20F	21F
A	57	76	95	114	133	152	171	190	209	228	247	266	285	304	323	342	361	380	399
B	159.5	178.5	197.5	216.5	235.5	254.5	273.5	292.5	311.5	330.5	349.5	368.5	387.5	406.5	425.5	444.5	463.5	482.5	501.5
C	171.5	190.5	209.5	228.5	247.5	266.5	285.5	304.5	323.5	342.5	361.5	380.5	399.5	418.5	437.5	456.5	475.5	494.5	513.5

AIRTAC 6D Haberleşmeli Pnömatik Valfler/ AIRTAC 6D Communication Pneumatic Valves

Communication cable M12 to M12**Communication cable M12 to RJ45****Power supply cable M12 to wires**

Wire layout instruction			
Terminal No.	Gauge(AWG)	Description	Color
1	22	DC24V±10%(Power supply for solenoid valve)	Brown
2	22	0V(Power supply for solenoid valve)	White
3	22	DC24V ± 10%(Power supply)	Blue
4	22	0V(Power supply)	Black