


**QSLH Yüksek Basınç Filtresi / High Press Filter**




**Özellikler / Specification**

Model /	QSLH				
Prot Size (G) /	QSLH-02 1/4"	QSLH-03 3/8"	QSLH-04 1/2"	QSLH-06 3/4"	QSLH-08 1"
Fluid /	Compressed Air				
Ambient Temperature (°C) /	-5~60				
Max. Working Pressure (MPa) /	4				
Operating Pressure Range (MPa) /	0.05~3				
Filter Precision /	5µm or 40µm				

**Sembol / Symbol**

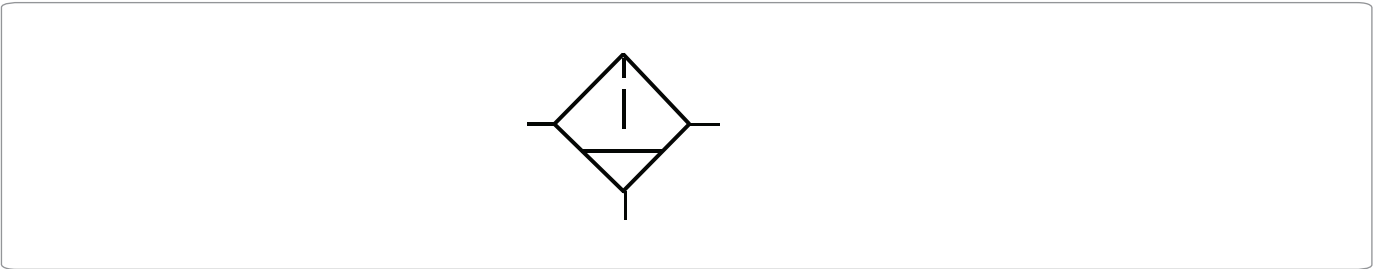

**How to Order**

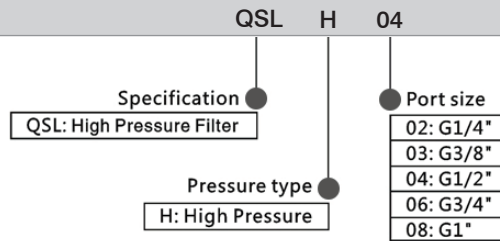


**Product Feature:**


1. Compressed air can be adjusted from 4MPa to 3MPa and kept steady-going

**Dimension (mm)**

■ QSLH-02, 03, 04

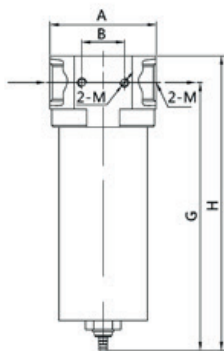

■ QSLH-06, 08

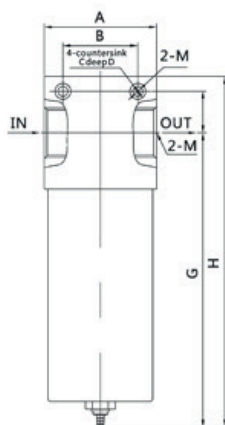

Nominal Diameter	type	A	B	C	D	E
02		60×55	24	-	-	-
03		60×55	24	-	-	-
04		60×55	24	-	-	-
06		75×75	50	10.5	6.5	6.5
08		75×75	50	10.5	6.5	6.5

Nominal Diameter	type	F	G	H	M
02		-	150.5	165.5	G1/4
03		-	150.5	165.5	G3/8
04		-	150.5	165.5	G1/2
06		27.5	195.5	233	G3/4
08		27.5	195.5	233	G1