

## Quick Connecting Tube Fittings

### WPM SERIES




#### Product features

One-Touch tube fittings are used in pneumatics piping.  
 The tube fittings come in wide variety of models to meet all your needs in pneumatics piping.  
 Even after installation, in direction of the tube can be changed freely.  
 Nickel-plated metal body ensures Anti-Corrosion and Anti-Contamination.  
 All R and NPT threads are Pre-Costed sealant.  
 All cylindrical threads are standard with O-Ring seals.

#### Speciality

Fluid	Air, Vacuum
Operating Pressure	0-1.0MPa (150 psi)
Negative Pressure	-100KPa(-29.5 in-Hg)
Max Pressure	1.5MPa
Operating Temperature	0-60°C(32-140°F)
Applicable Tube	Polyurethane and Nylon

#### Dimensions

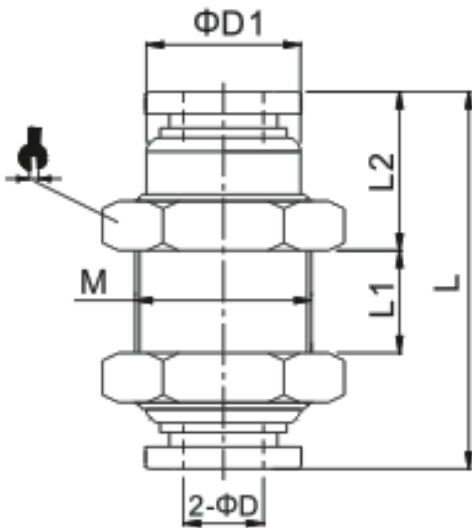

MODEL	φD	φD1	φD2	M	L	L1	L2	
WPM04	4	10	3.2	M12X1	30.5	9.5	10	14
WPM06	6	12	3.2	M14X1	31	7.5	10.6	17
WPM08	8	14	3.2	M16X1	34.5	6.5	12	19
WPM10	10	17	3.2	M20X1	41.5	11.5	12	24
WPM12	12	20	4.2	M22X1	44.5	12.5	13.5	26
WPM14	14	22	4.2	M24X1	45	14	12.5	27
WPM16	16	24	4.2	M26X1	48	16	13.5	29