

Quick Connecting Tube Fittings

WPU SERIES



Product features


- One-Touch tube fittings are used in pneumatics piping.
- The tube fittings come in wide variety of models to meet all your needs in pneumatics piping.
- Even after installation, in direction of the tube can be changed freely.
- Nickel-plated metal body ensures Anti-Corrosion and Anti-Contamination.
- All R and NPT threads are Pre-Costed sealant.
- All cylindrical threads are standard with O-Ring seals.

Speciality

Fluid	Air, Vacuum
Operating Pressure	0-1.0MPa (150 psi)
Negative Pressure	-100KPa(-29.5 in-Hg)
Max Pressure	1.5MPa
Operating Temperature	0-60°C(32-140°F)
Applicable Tube	Polyurethane and Nylon

Dimension

MODEL	φD	φD1	φD2	φD3	L
WPU04	4	4	11.5	11.5	34
WPU06	6	6	13.5	13.5	35.5
WPU08	8	8	15	15	38.5
WPU10	10	10	19	19	48
WPU12	12	12	21.5	21.5	49
WPU14	14	14	23.5	23.5	48
WPU15	15	15	26.5	26.5	64
WPU16	16	16	26.5	26.5	64
WPU06-04	6	4	13.5	11.5	34.5
WPU08-04	8	4	15	13.5	36.5
WPU08-06	8	6	15	13.5	36.5
WPU10-06	10	6	19	15	44
WPU10-08	10	8	19	15	44
WPU12-06	12	6	21.5	19	48
WPU12-08	12	8	21.5	19	48
WPU12-10	12	10	21.5	19	49
WPU14-12	14	12	23.5	23.5	48
WPU16-12	16	12	26.5	26.5	64
WPU16-14	16	14	26.5	26.5	64

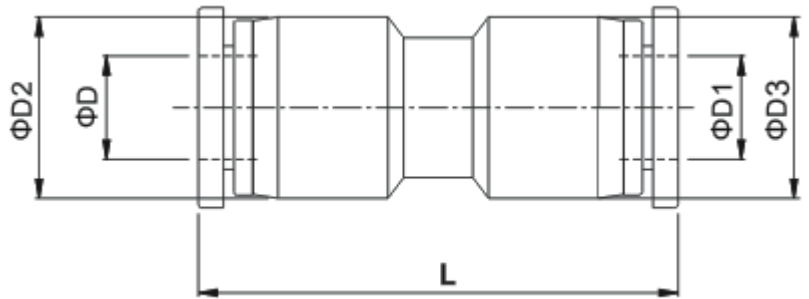

MODEL	φD	φD1	φD2	φD3	L
WPU5732	5/32	5/32	11.5	11.5	34
WPU3/16	3/16	3/16	11.5	11.5	34
WPU1/4	1/4	1/4	13.5	13.5	35.5
WPU5/16	5/16	5/16	15	15	38.5
WPU3/8	3/8	3/8	19	19	48
WPU1/2	1/2	1/2	21.5	21.5	49
WPU3/16-5/32	3/16	5/32	11.5	11.5	34
WPU1/4-3/16	1/4	3/16	13.5	11.5	35.5
WPU5/16-1/4	5/16	1/4	15	13.5	38.5
WPU3/8-5/16	3/8	5/16	19	15	47
WPU1/2-3/8	1/2	3/8	21.5	19	49