

**Push-in Fittings**

**WPVT SERIES**




**Product features**

- It's made of copper pneumatic piping joints
- Not only the body but also the sleeve, both of them are made from copper, which is good for flame resistance, heat resistance and splash performance

**Speciality**

Operating Temperature	-20~+80°C
Operating Pressure	0-1.0MPa
Fluid	Aia, Vacuum
Applicable Tube	Polyurethane and Nylon

**Dimension**

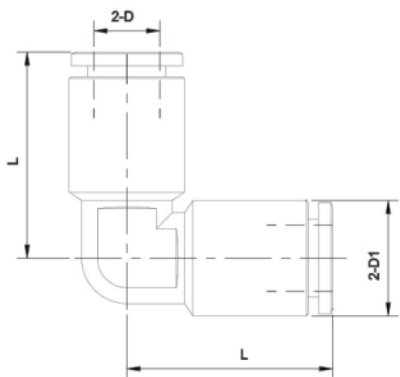

MODEL	φD	φD1	L
WPVT 04	4	8.5	18.5
WPVT 06	6	12	25
WPVT 08	8	14	27.2
WPVT 10	10	16	32
WPVT 12	12	18	33.2