


## WINMAN WILA Serisi Manuel Yağlayıcılar / WILA Series Hand-Pull Manuel Lubricators

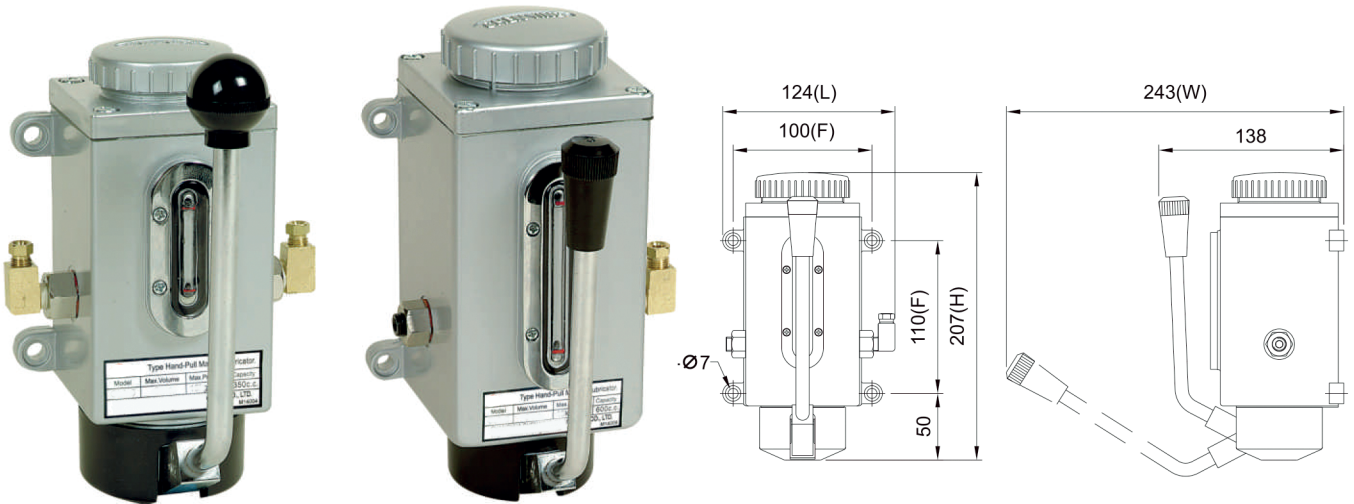

WILA-6-D-H-1

WILA-8-R-H-1

WILA-8-R-H-1 Type Standard Externals

**◆ Features**

- 1.WILA type is divided by the volume of oil tank WILA-6(350cc) and WILA-8(600cc).
- 2.Low cost, high practicality. It can be used in diverse machinery.
- 3.Easy to be operated by pushing the handle down for oil feeding.
- 4.Small discharge volume and easy to install.
- 5.The unit is equipped with reverse stopper that prevents the back-flow of oil.
- 6.It has an oil outlet on left or right side of the unit. Dual outlets (left and right sides) are also available.

**◆ Application of Machines Equipment**

- 1.This unit can work with the machines that do not need to feed oil at certain time.
- 2.It's suitable for various kinds of machine tools and automatic machinery.

Model	Max Volume	Max Pressure	Capacity	Discharge Bore	Outlet Number	Fixed Hole Distance(mm)	Length (mm)	Width (mm)	Height (mm)	Oil Viscosity	Weight (kg)
WILA-6	8cc	15kgf/cm <sup>2</sup>	350cc	Ø4	1	85,85mm	112	134	188	32-68cSt@40°C	1.23
					2						1.25
				Ø6	1						1.24
					2						1.27
WILA-8	8cc	15kgf/cm <sup>2</sup>	600cc	Ø4	1	100,110mm	124	138	207		1.50
					2						1.52
				Ø6	1						1.50
					2						1.53

**◆ Order code :**

<b>WILA-6</b>	<b>R</b>	<b>H</b>	<b>1</b>	<b>✳</b>
Tank Capacity 6 : 350cc 8 : 600cc	Discharge Outlet Side L : Left Hand Outlet R : Right Hand Outlet D : Dual Outlet	Outlet Adapter H : Elbow Adapter D : Straight Adapter B : Block	Discharge Bore 0 : Ø4 1 : Ø6	Special Request