


WXY 15 SERIES


Micro Solenoid Valve

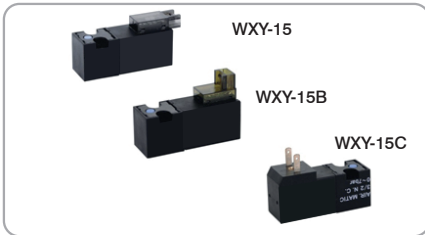

Speciality

Use as single valve or valve group.
 Often use as pilot valve for large orifice air valve or control of min single acting cylinder.
 Lower power consumption, direct controlled by PC.
 Small size and light weight, easy installation, small occupied space.
 No need of lubrication, durable.
 Coil with LED & over - voltage protection device .

Dimensions

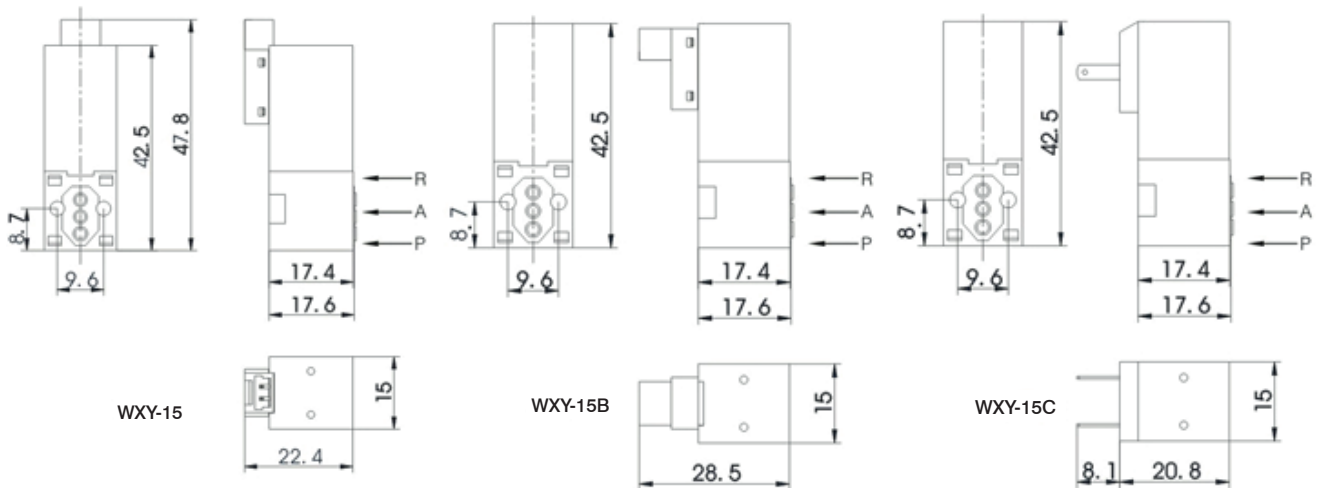

Technical Characteristics

Fluid Medium	Compressed air
Motion Pattern	Direct Drive Type
Type	2/3 NC or 2/3 NO
Orifice (mm)	1.4 mm
Connection Port	M3-M5 (to manifold)
Working Pressure (MPa)	0~0.7 MPa
Working Temperature (C)	-5° C ~ +55° C
Voltage Range	DC12V/DC24V
Insulation	F.H
Power Consumption	2.3W
Material of Body	PA66
Seal	NBR