


# VRP


## Single acting pilot check valves

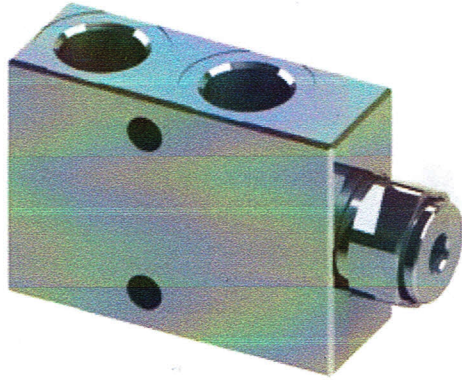

### Ordering Code

		01	02	
		VRP		
01	(Single acting pilot check valves)			VRP
02	Dimensione Size	BSPP1/2		120

### Hydraulic circuit





### Technical data

Mineral oil	ISO 6743/4 (DIN 51524)
Oil viscosity	15-250 mm <sup>2</sup> /s (15 to 250 cSt)
Max contamination index with filter	ISO 4406:1999 Classe 19/17/14
Oil temperature	-20°C +80°C -4°F + 176°F
Ambient temperature	-20°C +50°C -4°F+ 122°F

It is necessary a filter use to protect the valve (advised filtration 15 μm)  
 Max leakage 0,015 in<sup>3</sup>/min - 5 drops/min

### Performances

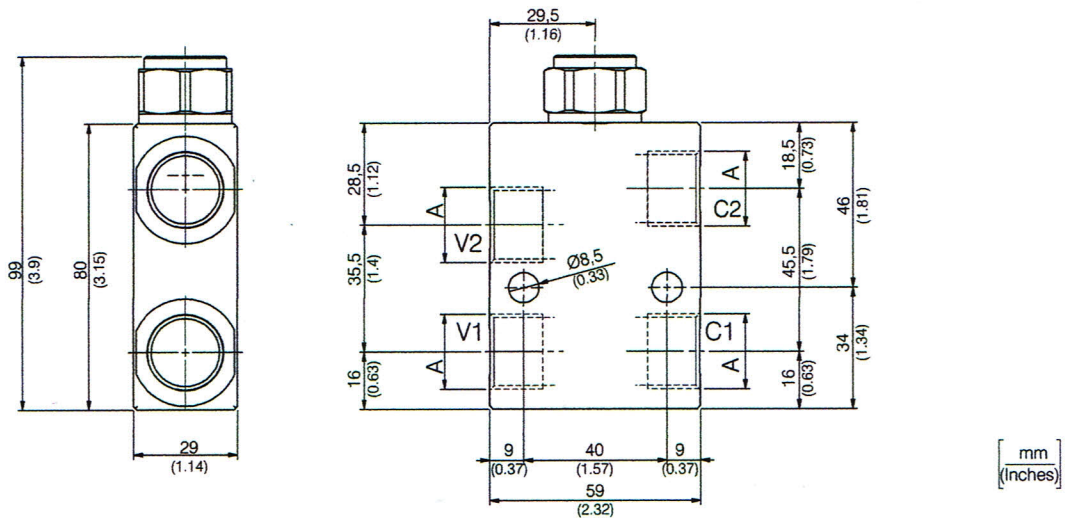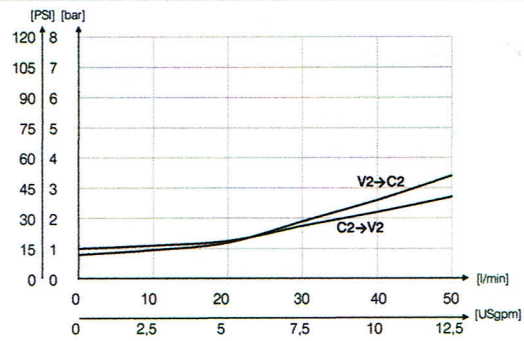

### Technical characteristics

Code	A	Portata max (l/min) Max flow (USgpm)	Pressione max (bar) Max pressure (PSI)	Approx weight (lb)	Pilot ratio
VRP120	BSPP1/2	50 (13.2)	350 (5075)	0,9(2)	1:4