


WINMAN Solenoid Valf (5/2 yollu, 5/3 yollu) / Solenoid Valve (5/2 way, 5/3 way)

4V100 Serisi /4V100 Series



Sembol /Symbol



Ürün Özelliği / Product Feature

- 1. Pilot-oriented mode: Internal pilot or external pilot.
- 2. Structure in sliding column mode: good tightness and sensitive reaction.
 3. Three position solenoid valves have three kinds of central function for your choice.
- 4. Double control solenoid valves have memory function
- 5. Internal hole adopts special processing technology which has little attrition friction, low start pressure and long service life.
- 6. No need to add oil for lubrication.

 7. It is available to form integrated valve group with the base to save installation space.
- Affiliated manual devices are equipped to facilitate installation and debugging.
 Several standard voltage grades are optional.

Özellikler / Specification

Model	4V110-M5 4V120-M5	4V130C-M5 4V130E-M5 4V130P-M5	4V110-06 4V120-06	4V130C-06 4V130E-06 4V130P-06					
Fluid	Air (to be filtered by 40 μ m filter element)								
Acting		Internal pilot	or external pilot						
Port size [Note1]	In=Ou	ut=M5	ln:	=Out=1/8"					
Orifice size	5.5mm ² (Cv=0.31)	5.0mm ² (Cv=0.28)	12.0mm ² (Cv=0.67)	9.0mm ² (Cv=0.50)					
Valve type	5 port 2 position	5 port 3 position	5 port 2 position	5 port 3 position					
Operating pressure	0.15~0.8MPa(21~114psi)								
Proof pressure	1.2MPa(175psi)								
Temperature	-20~70°C								
Material of body	Aluminum alloy								
Lubrication [Note2]	Not required								
Max. frequency [Note3]	5 cycle/sec	3 cycle/sec	5 cycle/sec	3 cycle/sec					
Weight	4V110-M5:120 4V120-M5:175	200	4V110-06:120 4V120-6-06:175	200					


[Note1] PT thread, G thread and NPT thread are available.

[Note2] Once lubricated air is used, continue with same medium to optimise valve life span. Lubricants like ISO VG32 or equivalent are recommended.
 [Note3] The maximum actuation frequency is in the no-load state.

Bobin Özellikleri / Coil Specification

Item	specification										
Standard voltage	AC220V	AC110V	AC24V	DC24V	DC12V						
Scope of voltage	AC: ±15% DC: ±10%										
Power consumption	3.5VA	3.5VA	4.0VA	2.5W	2.5W						
Protection		IP65(DIN40050)								
Temperature classification		В	Class								
Electrical entry	Terminal, Grommet										
Activating time		0.05	sec and below								


Sipariş Kodu / Ordering Code




①Model	②Code	③Valve type	④Port size	⑤ Voltage	©Electrical entry	⑦Thread type
4V: Solenoid valve (5/2, 5/3 way)	4 400 0 1	10: Single solenoid 5/2 way 20: Double solenoid 5/2 way 30C: Double solenoid 5/3 way closed center 30E: Double solenoid 5/3 way exhaust center 30P: Double solenoid 5/3 way pressure center	M5: M5	A: AC220V B: DC24V	Blank: Terminal	No this code
	1: 100 Series		06: 1/8"	C: AC110V E: AC24V F: DC12V	Blank: Terminal I: Grommet	Blank: PT G: G T: NPT

Please refer to 76 for manifold specification and the order way.

Akış Şeması / Flow Chart









WINMAN Solenoid Valf (5/2 yollu, 5/3 yollu) / Solenoid Valve (5/2 way, 5/3 way)

4V100 Serisi /4V100 Series


İç Yapı / Inner Structure

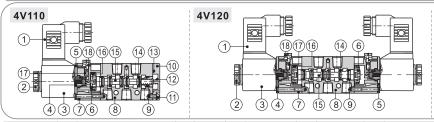

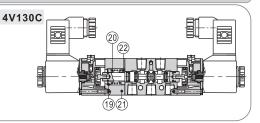


1	۱o.	Item	No.	Item	No.	Item	No.	Item	No.	Item	No.	Item	No.	Item	No.	Item	No.	Item	No.	Item	No.	Item
Г	1	Connector	3	Coil	5	Fixed plate	7	Pilot kit	9	Wear ring	11	Fixed screw	13	Bottom cover gasket	15	Spool	17	Override spring	19	Spring holder	21	Side cover
	2	Coil net	4	Armature	6	Piston	8	Body	10	Bottom cover	12	Spool spring	14	Spool O-ring	16	Piston O-ring	18	Manual ovveride	20	Return spring	22	Spring holder

Boyutlar / Dimensions

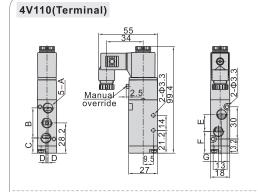







Model / Item	Α	В	С	D	Е	F	В
4V110-M5	M5X0.8	27	14.7	0	14	21.2	0
4V110-06	1/8"	28	14.2	1	16	20.2	3


4V120(Terminal) 55 34 Wanual override
4V120(Grommet)






Model / Item	Α	В	С	D	Е	F	В
4V120-M5	M5X0.8	27	57.7	0	14	64.3	0
4V120-06	1/8"	28	57.2	1	16	63.2	3

4V130(Terminal)

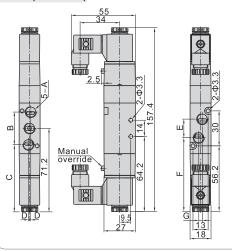

4V130(Grommet)



Model / Item	Α	В	С	D	Е	F	В
4V130-M5	M5X0.8	27	57.7	0	14	64.3	0
4V130-06	1/8"	28	57.2	1	16	63.2	3