


SANG-A GNSE-G Serisi Dirsek Hız Ayar Bağlantılar

Male Straight

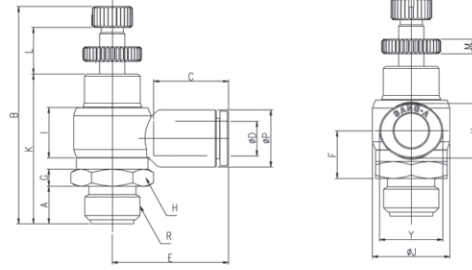

Boyutlar

MODEL [ØD-T] Tube: (Metric) - Thread: (G)

MODEL	ØD	R	ØP	A	B	C	E	F	G	H	I	ØJ	K	L	M	X	Y	W.G(g)	Q'ty/ inbox
GNSE 04G01	4	G1/8	9	6.4	42.6	14.5	20.9	9.9	4	14	12.2	14.4	28.1	10.5	3.5	8.6	10.8	20.8	50
GNSE 04G02	4	G1/4	9	9	51.7	14.5	22.8	12.4	4	17	12	18.4	35.6	11.1	3.5	8.6	10.8	22	50
GNSE 06G01	6	G1/8	11.2	6.4	42.6	15.5	22	9.9	4	14	12.2	14.4	28.1	10.5	3.5	11	13	21.6	50
GNSE 06G02	6	G1/4	11.2	9	51.7	15.5	24	12.4	4	17	12	18.4	35.6	11.1	3.5	11	13	39.8	50
GNSE 06G03	6	G3/8	11.2	10.7	58.3	15.5	26	15.3	5	20	15.7	22	41.3	12	3.5	11	13	72.5	25
GNSE 08G01	8	G1/8	13.6	6.4	42.6	15.5	25.1	8.9	4	14	12.2	14.4	28.1	10.5	3.5	13	15	22.6	50
GNSE 08G02	8	G1/4	13.6	9	51.7	17.8	27.6	11.3	4	17	12	18.4	35.6	11.1	3.5	13	15	44.6	50
GNSE 08G03	8	G3/8	13.6	10.7	58.3	17.8	28.6	15.9	5	20	15.7	22	41.3	12	3.5	13	15	73.4	25
GNSE 08G04	8	G1/2	13.6	13	61.8	17.8	31.6	16.7	6	24	18	28	44.8	12	3.5	13	15	100.1	25
GNSE 10G02	10	G1/4	16.3	9	51.7	19.4	29.6	9.8	4	17	12	18.4	35.6	11.1	3.5	16	18.5	47.6	25
GNSE 10G03	10	G3/8	16.3	10.7	58.3	19.4	30	14.3	5	20	15.7	22	41.3	12	3.5	16	18.5	76.3	25
GNSE 10G04	10	G1/2	16.3	13	61.8	19.4	32.9	15.1	6	24	18	28	44.8	12	3.5	16	18.5	103.2	20
GNSE 12G03	12	G3/8	19.7	10.7	58.3	22.4	35.9	12.6	5	20	15.7	22	41.3	12	3.5	19.5	22.5	79.4	20
GNSE 12G04	12	G1/2	19.7	13	61.8	22.4	38.9	13.4	6	24	18	28	44.8	12	3.5	19.5	22.5	106.1	20